




# 5819

## MULTIPLIER PHOTOTUBE

10-Stage, Head-On Type  
with 1-1/2" Semi-Transparent Cathode and S-9 Response

RCA-5819 is a head-on type of high-vacuum multiplier phototube intended for use in scintillation counters for the detection and measurement of nuclear particle radiation, and in other applications involving low-level, large-area light sources.

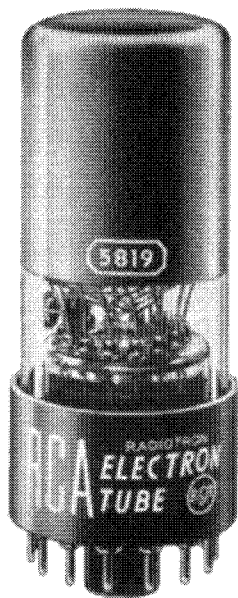

The spectral response of the 5819 covers the range from about 3000 to 6400 angstroms, as shown in Fig. 1. Maximum response occurs at approximately 4800 angstroms. The 5819, therefore, has high sensitivity to blue-rich light and negligible sensitivity to red radiation. Because of its spectral response, the 5819 is well suited for use with organic phosphors such as anthracene as well as with inorganic materials such as silver-activated zinc sulfide.

Design features of the 5819 include a semi-transparent cathode having a diameter of 1-1/2 inches on the inner glass surface of the face end of the bulb, and ten electrostatically focused multiplying stages. The relatively large cathode area permits very efficient collection of light from excited phosphor crystals, such as are employed in scintillation counters.

The 5819 is capable of multiplying feeble photoelectric current produced at the cathode by an average value of 600,000 times when operated at 90 volts per stage. The output current of the 5819 is a linear function of the exciting illumination under normal operating conditions.

The frequency response of the 5819 is flat up to a frequency of about 50 megacycles per second above which the variation in electron transit time becomes the limiting factor.

In the scintillation type of nuclear radiation detector, the 5819 is particularly useful because of its large, essentially flat cathode area which permits good optical coupling between the phosphor and the cathode. As a result, the scintillation pulses are larger in amplitude than the majority of the dark-current pulses and thus discrimination against the dark-current pulses is facilitated. The 5819 permits the design of a scintillation counter with high efficiency and a resolving time of only a small fraction of a microsecond.

### DATA

#### General:

Spectral Response	.....	S-9
Wavelength of Maximum Response	..	4800 ± 500 angstroms
Cathode, Semi-transparent:		
Shape	.....	Circular
Window Area	.....	1.8 sq. in.
Minimum Diameter of Window	.....	1.5 in.
Direct Interelectrode Capacitances:		
Anode to Dynode No.10	.....	4.2 μμf
Anode to All Other Electrodes	.....	6.5 μμf
Overall Length	.....	5-5/8" ± 3/16"
Seated Length	.....	4-7/8" ± 3/16"
Maximum Diameter	.....	2-1/4"
Bulb	.....	T-16
Base	.....	Medium-Shell Dineptal 14-Pin, Non-hygroscopic
Mounting Position	.....	Any

#### Maximum Ratings, Absolute Values:

ANODE-SUPPLY VOLTAGE (DC or Peak AC) □	..	1250 max.	volts
SUPPLY VOLTAGE BETWEEN DYNODE NO.10 AND ANODE (DC or Peak AC)	..	150 max.	volts
PEAK ANODE CURRENT	.....	7.5 max.	ma
AVERAGE ANODE CURRENT ○	.....	0.75 max.	ma
AMBIENT TEMPERATURE	.....	75 max.	°C

#### Characteristics:

*With 90 volts per dynode stage and  
90 volts between dynode No.10 and anode*

	Min.	A <sub>v</sub> .	Max.	
DC Anode Dark Current # ●	-	-	0.05	μamp
Sensitivity:				
At 4800 angstroms . . .	-	14900	-	μamp/μwatt
Luminous: ▲				
Cathode . . . . .	-	40	-	μamp/lumen
Anode:				
At 0 cps . . . . .	10	24	-	amp/lumen
At 100 Mc. . . . .	-	21	-	amp/lumen
Current Amplification ■	-	600000	-	
Equivalent Noise Input ★	-	2 x 10 <sup>-11</sup>	-	lumen

*With 75 volts per dynode stage and  
50 volts between dynode No.10 and anode*  
A<sub>v</sub>.

Sensitivity:				
At 4800 angstroms . . . . .		3720		μamp/μwatt
Luminous: ▲				
Cathode . . . . .		40		μamp/lumen
Anode, at 0 cps . . . . .		6		amp/lumen
Current Amplification ■ . . . . .		150000		

- Referred to cathode.
- Averaged over any interval of 30 seconds maximum.
- \* Dark current due to thermionic emission and ion feedback may be reduced by the use of refrigerants.
- For maximum signal-to-noise ratio, operation below 1000 volts is recommended.
- ▲ For conditions where a tungsten lamp operated at a filament color temperature of 2870°K is used as a light source. A light flux of 10 microlumens from a rectangular aperture approximately 0.8" long and 0.2" wide is projected normal to the center of the cathode. The load resistor has a value of 0.01 megohm. The applied voltages are as indicated.
- Ratio of anode sensitivity to cathode sensitivity.
- ★ Defined as the value where the rms output current is equal to the rms noise current determined under the following conditions: 90 volts per stage, 25°C tube temperature, ac-amplifier bandwidth of 1 cycle per second, tungsten light source at 2870°K interrupted at a low audio frequency to produce incident radiation pulses alternating between zero and the value stated. The "on" period of the pulse is equal to the "off" period. The output current is measured through a filter which passes only the fundamental frequency of the pulses.


### GENERAL CONSIDERATIONS

An *electron multiplier* is a vacuum tube which utilizes the phenomenon of secondary emission to amplify signals composed of electron streams. In the 5819 multiplier phototube, represented in Fig. 2, the electrons emitted from the illuminated, semi-transparent cathode are accelerated to the first dynode (secondary emitter). The electrons impinging on the dynode surface produce many other electrons, the number depending on the energy of the impinging electrons. These secondary electrons are then directed by fixed electrostatic fields along curved paths to the second dynode where they produce more new electrons. This multiplying process is repeated in each successive stage, with an ever-increasing stream of electrons until those emitted from the last dynode (dynode No. 10) are collected by the anode and constitute the current utilized in the output circuit.

Dynode No. 10 is so shaped as to enclose partially the anode and to serve as a shield for it, in order to prevent the fluctuating potential of the anode from interfering with electron focusing in the interdynode region. Actually the anode consists of a grid which allows the electrons from dynode No. 9 to pass through it to dynode No. 10. Spacing between dynode No. 10 and anode creates a collecting field such that all the electrons it emits are collected by the anode. Hence, the output current is substantially independent of the instantaneous positive anode potential over a wide range. As a result of this characteristic, the 5819 can be coupled to any practical load impedance.

The shield which extends between dynode No. 1 and the anode shields dynode No. 1 and the cathode from the anode and prevents ion feedback. If positive ions produced in the high-current region near the anode were allowed to reach the cathode or the initial dynode stages, they would cause the emission of spurious electrons which after multiplication would produce undesirable and

often uncontrollable regeneration. The metallic coating on the inner side wall of the glass bulb is connected to the cathode, and serves not only to prevent extraneous light from reaching dynode No. 1, but also to direct the electrons from the cathode toward dynode No. 1.

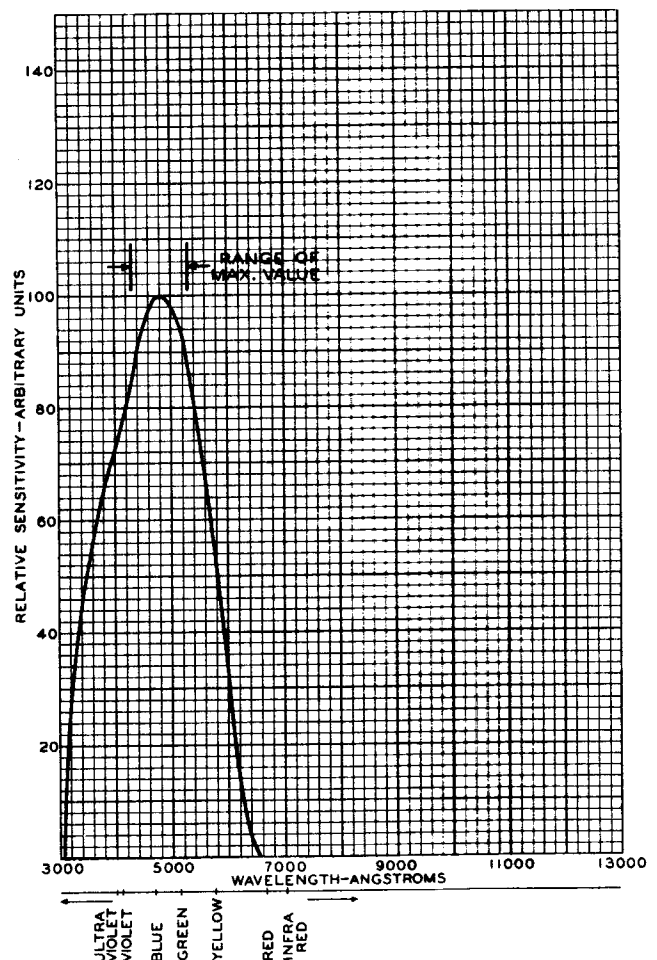

92CM-7274

Fig. 1 - Spectral Sensitivity Characteristic of Type 5819 which has S-9 Response. Curve is taken for Equal Values of Radiant Flux at all Wavelengths.

The grill through which the electrons reach dynode No. 1, is connected to dynode No. 1 and serves along with the accelerating electrode as an electrostatic shield for the open side of the electrode structure.

When the 5819 is operated with a very low cathode current, random variations occur in the rate of electron emission, and are observed as shot noise. Noise is also caused if the 5819 is operated with a voltage in excess of the maximum rating or if the voltage between dynode No. 1 and the cathode is too low. When too high a voltage per stage is used, positive-ion feedback causes

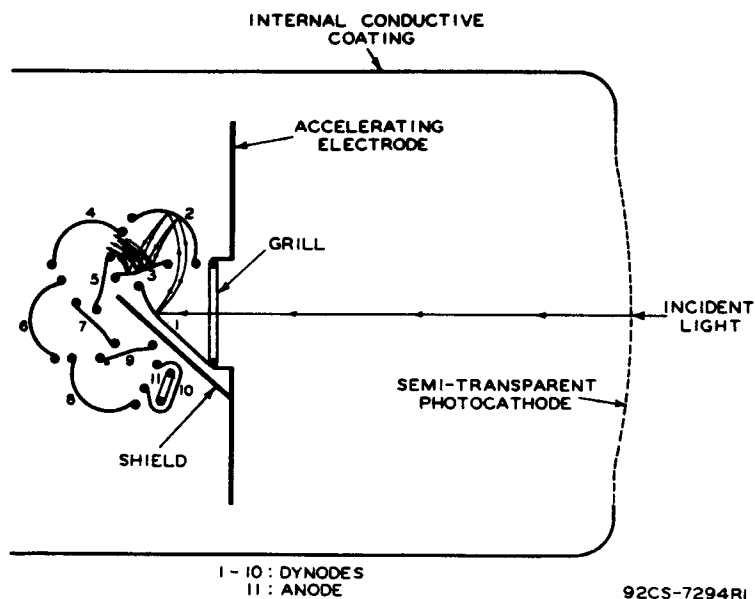


Fig. 2 - Schematic Arrangement of Type 5819 Structure.

regeneration, and when too low a voltage is applied between dynode No. 1 and cathode, the electrons from the cathode are not focused properly on dynode No. 1 with the result that many electrons are not channeled through the multiplier structure and gain is sacrificed. In order to minimize noise, it is recommended that the 5819 be operated with 150 volts between dynode No. 1 and cathode and with 75 volts between each of the succeeding dynode stages.

### INSTALLATION and APPLICATION

The *maximum ratings* shown in the tabulated data are limiting values above which the serviceability of the 5819 may be impaired from the viewpoint of life and satisfactory performance. Therefore, in order not to exceed these absolute ratings, the equipment designer has the responsibility of determining an average design value for each rating below the absolute value of that rating by an amount such that the absolute values will never be exceeded under any usual condition of supply-voltage variation, load variation, or manufacturing variation in the equipment itself.

The *maximum ambient temperature* as shown in the tabulated data is a tube rating which is to be observed in the same manner as other ratings. This rating should not be exceeded because too high a bulb temperature may cause the volatile cathode surface and dynode surfaces to evaporate with consequent decrease in the life and sensitivity of the tube.

The *operating stability* of the 5819 is dependent on the magnitude of the anode current and its duration. When the 5819 is operated at high values of anode current, a drop in sensitivity

(sometimes called fatigue) may be expected. The extent of the drop below the tabulated sensitivity values depends on the severity of the operating conditions. After a period of idleness, the 5819 usually recovers a substantial percentage of such loss in sensitivity.

The use of an average anode current well below the maximum rated value of 0.75 milliamperes is recommended when stability of operation is important. When maximum stability is required, the anode current should not exceed 100 microamperes.

The *range of sensitivity values* is dependent on the respective amplification of each dynode stage. Hence large variations in sensitivity can be expected between individual tubes of a given type. The overall amplification of a multiplier phototube is equal to the average amplification per stage raised to the  $n$ th power, where  $n$  is the number of stages. Thus, very small variations in amplification per stage produce very large changes in overall tube amplification.

Because these overall changes are very large, it is advisable for designers to provide adequate adjustment of the supply voltage per stage so as to be able to adjust the amplification of individual tubes to the desired design value. It is suggested that an overall voltage-adjustment range of at least 2 to 1 be provided. When the output current can be controlled by change in the illumination of the photocathode of the multiplier phototube, the required range of adjustment in the voltage per stage can be reduced.

Fig. 3 shows sensitivity and current amplification versus the dc voltage per stage.


The *base pins* of the 5819 fit the medium diheptal 14-contact socket. The socket should be made of high-grade, low-leakage material, and should be installed so that the incident light falls on the face end of the tube.

*Magnetic shielding* of the 5819 may be necessary. It will be observed with certain orientations of the 5819 that the earth's magnetic field is sufficient to cause a noticeable decrease in the response of the tube. Therefore, it may be desirable to provide magnetic shielding for the 5819, particularly when it is to be used in a strong magnetic field.

Adequate *light shielding* should be provided to prevent extraneous light from reaching any part of the 5819. Although the metallic coating on the inner side wall of the glass bulb serves to reduce the amount of extraneous light reaching the electrodes, it is inadequate to shield completely the entire structure from extraneous light.



Whenever frequency response is important, the leads from the 5819 to the amplifier should be short so as to minimize capacitance shunting of the phototube load.

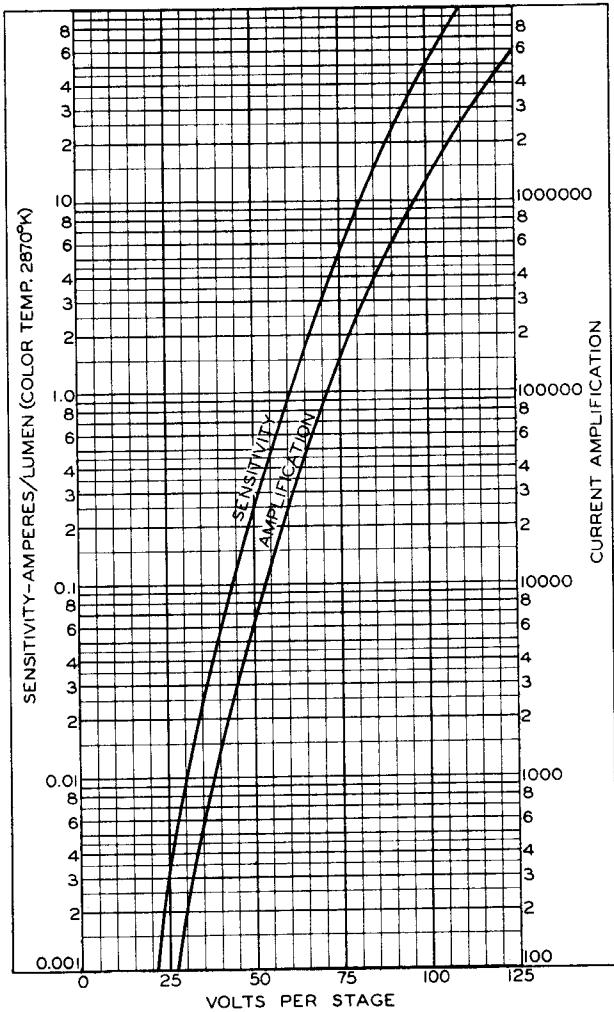

92CL-7258R2

Fig. 3 - Average Characteristics of Type 5819.


The dc supply voltages for the electrodes can be obtained conveniently from a high-voltage, vacuum-tube rectifier. The voltage for each dynode and for the anode can be supplied by spaced taps on a voltage divider across the rectified power supply. The current through the voltage divider will depend on the voltage regulation required by the application. In general, the current in the divider should be about 10 times the maximum value of total dynode current flowing through the divider. Such a value will prevent variations of the dynode potentials by the signal current. Because of the relatively large divider current required for good regulation, the use of a rectifier of the full-wave type is recommended. Sufficient filtering will

ordinarily be provided by a well-designed, two-section filter of the capacitor-input type. A choke-input filter may be desirable for certain applications to provide better regulation. Due to critical dependence of the gain of the 5819 on voltage, rapid changes in the voltage resulting from insufficient filtering of the power supply will introduce hum modulation; and slow shifts in the line voltage due to poor regulation will cause a change in the level of the output. When the dc supply voltage is provided by means of a rectifier, satisfactory regulation can be obtained by the use of a vacuum-tube regulator circuit of the mu-bridge type.

In most applications, it is recommended that the positive high-voltage terminal be grounded rather than the negative terminal. With this method, which places the cathode at a high negative potential with respect to ground, the dangerous voltages can more easily be made inaccessible.

The high voltages at which the 5819 is operated are very dangerous. Care should be taken in the design of apparatus to prevent the operator from coming in contact with these high voltages. Precautions should include the enclosure of high-potential terminals and the use of interlock switches to break the primary circuit of the high-voltage power supply when access to the apparatus is required.


In the use of the 5819, as with other tubes requiring high voltages, it should always be remembered that these high voltages may appear at points in the circuit which are normally at low potential, because of defective circuit parts or to incorrect circuit connections. Therefore, before any part of the circuit is touched, the power-supply switch should be turned off and

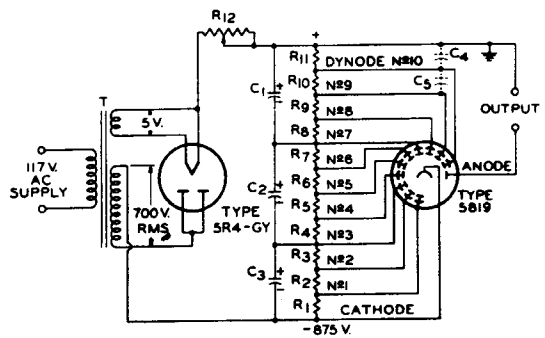

92CM-7301R1

- C1 C2 C3: 16  $\mu$ f, electrolytic, 450 volts (dc working)
- C4 C5: 8  $\mu$ f, electrolytic, 150 volts (dc working)
- Required only if high peak currents are drawn.
- R1: 100000 ohms, 1/2 watt
- R2 R3 R4 R5 R6 R7 R8 R9 R10: 50000 ohms, 1/2 watt
- R11: 33000 ohms, 1/2 watt
- R12: 100000 ohms, 1 watt, variable (Centralab A122, or equivalent)
- T: United Transformer Corp. No. R-2, or equivalent

Fig. 4 - Simple Half-Wave Rectifier Power-Supply Circuit with Voltage Divider for Supplying DC Voltages to Type 5819.

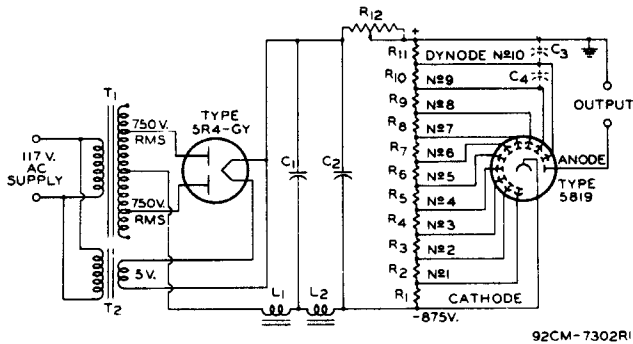

92CM-7302R1

- C1 C2: 2  $\mu$ f, 1000 volts (dc working)  
 C3 C4: 8  $\mu$ f, electrolytic, 150 volts (dc working)  
 Required only if high peak currents are drawn.  
 L1 L2: United Transformer Corp. No.R-17, or equivalent  
 R1: 39000 ohms, 2 watts  
 R2 R3 R4 R5 R6 R7 R8 R9 R10: 18000 ohms, 1 watt  
 R11: 12000 ohms, 1 watt  
 R12: 200000 ohms, 12 watts, variable (General radio Type 471-A, or equivalent)  
 T1: United Transformer corp. No.S-45, or equivalent  
 T2: United Transformer Corp. No.FT-6, or equivalent

Fig. 5 - Full-Wave Rectifier Power-Supply Circuit with Voltage Divider for Supplying DC Voltages to Type 5819 in Applications Critical as to Hum Modulation.

both terminals of any capacitors grounded. Also, the use of a protective resistor having a minimum value of 10,000 ohms in the output circuit is recommended as a desirable procedure to prevent possible damage to component parts during adjustment.

Typical power-supply circuits for the 5819 are shown in Figs. 4 and 5. The circuit in Fig. 4 utilizes a half-wave rectifier to provide the dc power for the 5819. In applications where excellent regulation particularly for wide variation in output current of the 5819 is required and where minimum hum modulation is essential, the circuit of Fig. 5 may be used.

The anode family for the 5819 is shown in Fig. 6.

The use of a refrigerant, such as dry ice or liquid air, to cool the bulb of the 5819 is recommended in those applications where maximum gain with unusually low dark current is required. The base of the tube should not be immersed in liquid air, because it is subject to stress on cooling to liquid-air temperature and may crack.

### REFERENCES

- R. B. Janes and A. M. Glover, "Recent Developments in Phototubes", RCA Review, Vol. 6, No. 1, pp. 43-54, July, 1941.  
 G. A. Morton and J. A. Mitchell, "Performance of 931-A Multiplier in a Scintillation Counter", RCA Review, Vol. 9, No. 4, pp. 632-642, December, 1948.  
 Hartmut Kallman, "Quantitative Measurements with Scintillation Counters", Physical Review, Vol. 75, No. 4, pp. 623-626, February 15, 1949.  
 Ralph W. Engstrom, "Multiplier Phototube Characteristics; Application to Low Light Levels", Journal of the Optical Society of America, Vol. 37, pp. 420-431, June, 1947.  
 G. A. Morton and K. W. Robinson, "A Coincidence Scintillation Counter", Nucleonics, Vol. 4, No. 2, pp. 25-29, February, 1949.

Fitz-Hugh Marshall, J. W. Colman, and A. I. Bennett, "Photo-Multiplier Radiation Detector", The Review of Scientific Instruments, Vol. 19, No. 11, pp. 744-770, November, 1948.

F. V. Hunt and R. W. Hickman, "On Electronic Voltage Stabilizers", Review of Scientific Instruments, Vol. 10, pp. 6-21, January, 1939.

J. W. Colman, "The Scintillation Counter", Proc. of the Institute of Radio Engineers, Vol. 37, No. 6, pp. 671-682, June, 1949.

J. S. Allen, "Recent Applications of Electron Multiplier Tubes", Proc. of the Institute of Radio Engineers, Vol. 38, No. 4, pp. 346-358, April, 1950.


W. H. Jordan and P. R. Bell, "Scintillation Counters", Nucleonics, Vol. 5, No. 4, October, 1949.

H. H. Goldsmith, "Bibliography on Radiation Detection", Nucleonics, Vol. 4, No. 5, May, 1949.

M. Deutsch, "Naphthalene Counters for Beta and Gamma Rays", Nucleonics, Vol. 2, No. 3, March, 1948.

Robert Hofstadter, "The Detection of Gamma Rays with Thallium-Activated Sodium-Iodide Crystals", Physical Review, Vol. 75, No. 5, pp. 796-810, March, 1949.

"Properties of Scintillation Materials", Nucleonics, Vol. 6, No. 5, pp. 70-72, May, 1950.

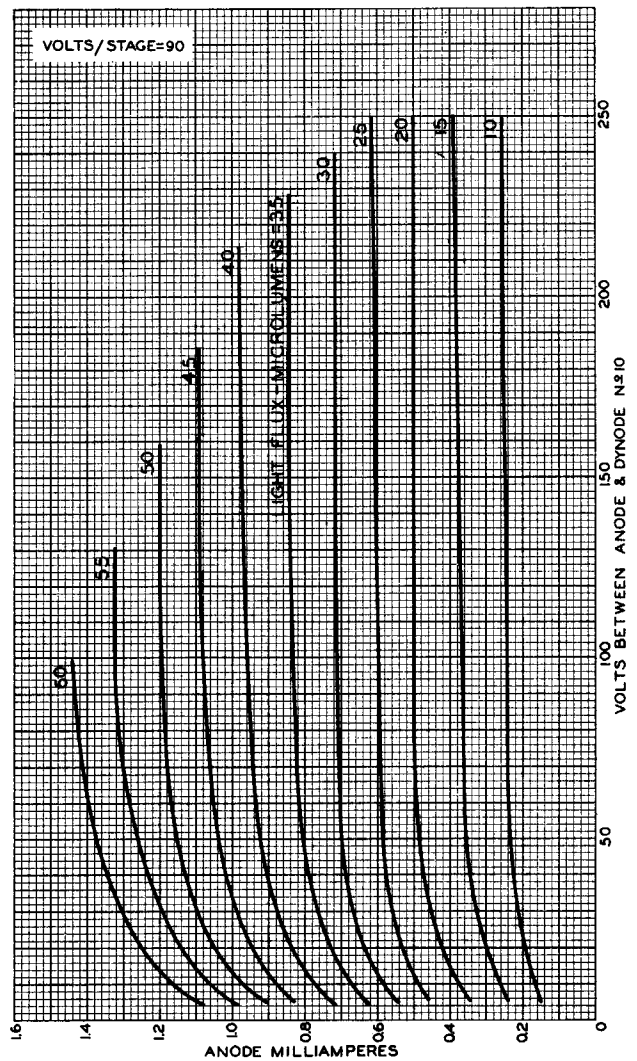


92CM-7255R2

Fig. 6 - Average Anode Characteristics of Type 5819.



### DIMENSIONAL OUTLINE

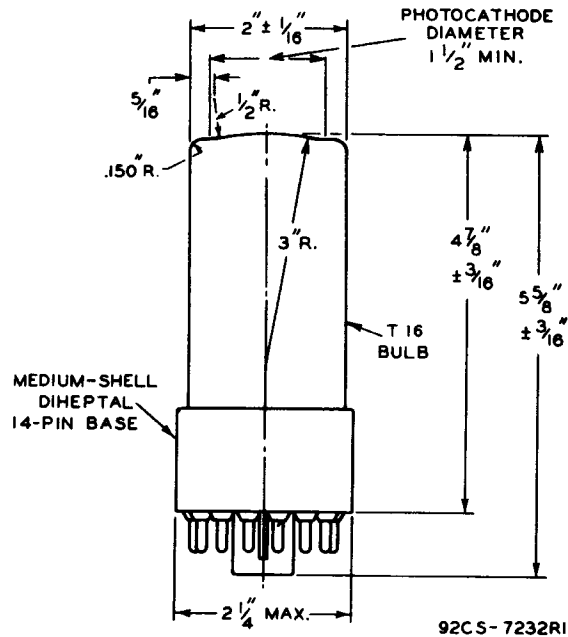


∠ OF BULB WILL NOT DEVIATE MORE THAN 2°  
IN ANY DIRECTION FROM THE PERPENDICULAR  
ERECTED AT THE CENTER OF BOTTOM OF THE BASE.

### SOCKET CONNECTIONS

#### Bottom View

- PIN 1: DYNODE No.1
- PIN 2: DYNODE No.2
- PIN 3: DYNODE No.3
- PIN 4: DYNODE No.4
- PIN 5: DYNODE No.5
- PIN 6: DYNODE No.6
- PIN 7: DYNODE No.7
- PIN 8: DYNODE No.8



- PIN 9: DYNODE No.9
- PIN 10: DYNODE No.10
- PIN 11: ANODE
- PIN 12: NO CONNECTION
- PIN 13: INTERNAL CONNECTION—DO NOT USE
- PIN 14: CATHODE

DIRECTION OF LIGHT:  
INTO END OF BULB

14M<sub>1</sub>

Devices and arrangements shown or described herein may use patents of RCA or others. Information contained herein is furnished without responsibility by RCA for its use and without prejudice to RCA's patent rights.