

STATUS: Standard


CLASSIFICATION OF EQUIPMENT: Unclassified

USING SERVICE: Army, Navy

DATE OF THIS SHEET: 8 Jan 52

AN/PRC-9

RADIO SET

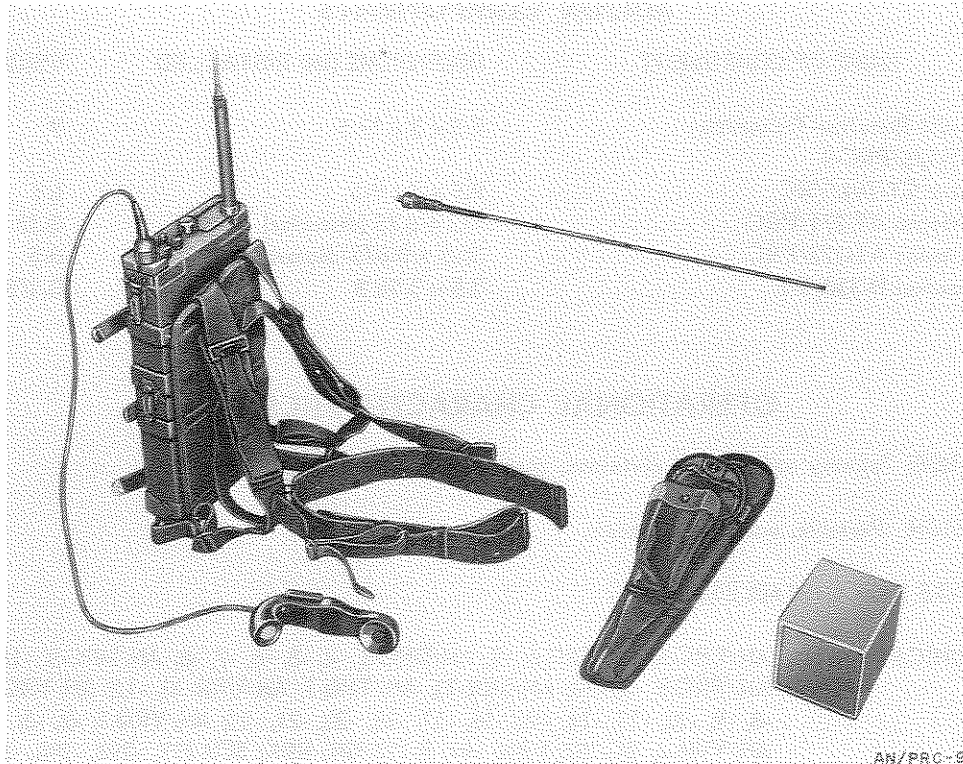

Radio Set AN/PRC-9 is a portable (man-carried), low-power, f-m (voice), radio transmitting and receiving equipment used for v-h-f, short-range, point-to-point, or radio relay communication by company and battery level units operating in the frequency range assigned to artillery units. It can also be installed and operated in aircraft.

This equipment consists essentially of a radio receiver-transmitter equipped with a carrying harness, antenna components, and related accessories.

It can be operated by remote control and adapted for homing use by the addition of appropriate auxiliary components. The set can also be operated in a vehicle.

Two of these sets can be operated back-to-back as an unattended radio relay station.

Power is supplied by one Battery BA-279/U, which is not supplied with the set.

AN/PRC-9

INSTRUCTION LITERATURE: TM 11-612

CLASSIFICATION OF EQUIPMENT: Unclassified

USING SERVICE: Army, Navy

DATE OF THIS SHEET: 8 Jan 52

RADIO SET

MAJOR COMPONENTS

QUANT	NAME OF COMPONENT	DIMENSIONS (IN) INSTALLED	WEIGHT (LBS)
1	Radio Receiver-Transmitter RT-175/PRC-9	9.5 x 3 x 10.5	9
1	Case CY-744/PRC	9.5 x 3 x 9.5	1.5
1	Antenna AT-271/PRC	113 x 0.75 (diameter)	0.33
1	Antenna AT-272/PRC	36.5 x 0.875 (diameter)	0.5
1	Handset H-33B/PT	3.5 x 3.5 x 8	0.875

OPERATIONAL CHARACTERISTICS

TACTICAL USE: Infantry and airborne divisions, company and battery level.

INSTALLATION: Portable, vehicular, aircraft.

APPROXIMATE RANGE (IN MILES): 5.

CAN COMMUNICATE WITH: AN/CRC-3; AN/FRC-6, -9; AN/GRC-3, -4, -5, -6, -7, -8; AN/MRC-5, -16;
 AN/PRC-8, -9, -10; AN/SRR-13; AN/TRQ-1; AN/URR-10, -12; AN/VRC-2, -5,
 -8, -9, -10, -13, -14, -15, -16, -17, -18, -20, -21, -22; AN/VRQ-1, -2, -3;
 AN/VRR-4; BC-787; MAN; MN; R-137/GR; RBK; SCR-293, -294, -298, -508,
 -509, -510, -528, -607, -608, -609, -610, -619, -628, -678, -808, -828.

TECHNICAL CHARACTERISTICS

FREQUENCY RANGE IN MEGACYCLES: 27.0 - 38.9.

TYPE MODULATION: Fm.

TYPE OF SIGNAL: Voice.

POWER OUTPUT: Transmitter, 1.0 w.

POWER REQUIREMENTS: Battery BA-279/U (not supplied).

PHYSICAL CHARACTERISTICS

Radio Set AN/PRC-9 weighs 26 pounds net, volume 1.075 cu ft. Packed for domestic shipment:
 total weight 30 pounds, total volume 3.33 cu ft. Packed for export shipment: total weight 40 pounds,
 total volume 4.85 cu ft. Shipped in 1 package both domestic and export.